

Get a Quote

Overview

Resilient Ethernet switches with 24 Gbit/s or 48 Gbit/s downstream ports and 10 Gbit/s upstream ports; highly efficient cooling and patented device sleeping technology conserve power and enable high-density build-out.

Quick Specification

Table 1 shows the Quick Specification.


Model	S5710-52X-LI-AC
Part Number	02350GEN
Description	S5710-52X-LI-AC (48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, AC 110/220V)
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Dimensions (H x W x D)	43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.4 in. x 8.7 in.)
Weight (with packaging)	5 kg (11.02 lb)
Stack ports	Four uplink 10GE SFP+ ports
PoE	Not supported

Figure 1 shows the appearance of S5710-52X-LI-AC.



Product Details

Figure 2 shows the structure of S5710-52X-LI-AC.

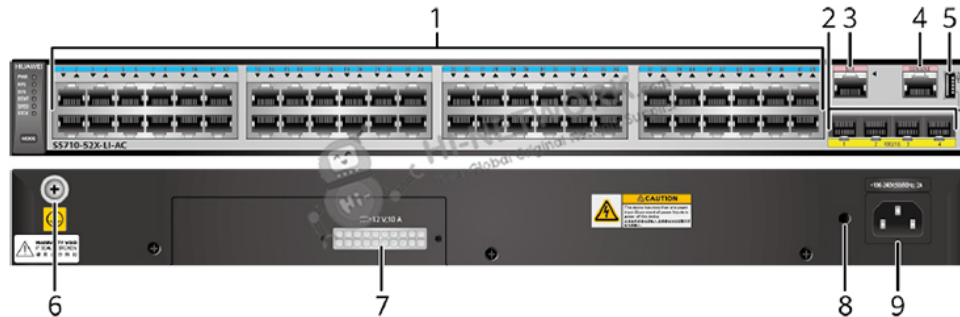

Note:

(1)	Forty-eight 10/100/1000BASE-T ports	(6)	Ground screw
(2)	Four 10GE SFP+ ports	(7)	RPS socket
(3)	One ETH management port	(8)	Jack for AC power cable locking strap
(4)	One console port	(9)	AC socket
(5)	One USB port		

Get more information

Do you have any question about the S5710-52X-LI-AC (02350GEN)?

Contact us now via info@hi-network.com.

Specification

S5710-52X-LI-AC Specification	
Model	S5710-52X-LI-AC
Part Number	02350GEN
Description	S5710-52X-LI-AC (48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, AC 110/220V)
Software Version	V200R008C00 to V200R012C00 versions
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	86.64 years
Mean time to repair (MTTR)	2 hours

Availability	> 0.99999
Service port surge protection	Common mode: ± 6 kV
Power supply surge protection	± 6 kV in differential mode, ± 6 kV in common mode
Dimensions (H x W x D)	43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.4 in. x 8.7 in.)
Weight (with packaging)	5 kg (11.02 lb)
Stack ports	Four uplink 10GE SFP+ ports
RTC	Supported
RPS	Supported
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)	54.7 W
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> • Tested according to ATIS standard • EEE enabled • No PoE power consumption 	34.4 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.) NOTE: When the altitude is 1800-5000 m (5906-16404 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.).
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 50.2 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)


S5710-52X-LI-AC (02350GEN)

Datasheet



Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

